



EFG009571

EFG Room 45 and 80

EFG Room is a screen system for building rooms within rooms. With EFG Room, you choose the level of visual – and acoustic – privacy you want. EFG Room is available in 45 and 80 mm thickness; the latter is AA classified for sound absorption and sound attenuation. The screen filling consists of recycled polyester fibre and textiles, pressed together with the fabric covering of the screen.

Product info


- Screens are available in two thicknesses (45 and 80 mm), three widths (840, 940 and 1240 mm) and three heights (1200, 1575 and 1950 mm).
- Screens are made of recycled, sound-absorbent polyester fibre and textiles, covered with Palermo, Cara or Event Screen fabric or equivalent felt upholstery.
- Pale grey metal parts.
- Screens can be linked at angles of 90 degrees, with T or X connections.
- Freestanding screens can be equipped with castors.
- Standard connection strips mean screens of either thickness can be combined.
- Panels available for cable management with power/data connection from ceiling or floor. An external horizontal cable tray is available as an option, placed at floor level.
- Options: Tempered glass panel to mount between screens, top section in tempered glass (EFG Room 80 only), and screen support.
- Guarantee: Five year warranty against defects resulting from faulty design, material or workmanship.
- Certified by the Nordic Eco Label "The Swan".
- Tested according to: EN 1023-1:1996, EN 1023-2:2000 and EN 1023-3:2000. Sound absorption measured according to NT ACOU 012 and ISO 354, assessed according to ISO 11654. Sound attenuation measured according to ISO 10053 and assessed according to NT ACOU 085.

Measurements

Art no	Height	Width	Weight
			
H40A01	1200	-	-
H40A02	1575	-	-
H40A03	1950	-	-
H40A05	1200/	-	-
H40A06	1575/	-	-
H40A07	1950/	-	-
H40A09	1200/	-	-
H40A10	1575/	-	-
H40A11	1950/	-	-
H40A17	1200/	-	-
H40A18	1575/	-	-
H40A19	1950/	-	-
H40A23	1200	1240	9
H40A24	1575	1240	11
H40A25	1950	1240	13
H40A30	1200/	-	-
H40A31	1575/	-	-
H40A32	1950/	-	-
H40A34	1200/175	-	-
H40A35	1575/175	-	-
H40A36	1950/175	-	-
H40A38	1200/230	-	-
H40A39	1575/230	-	-
H40A40	1950/230	-	-
H40A42	400	840	-
H40A43	400	940	-
H40A44	400	1240	-
H40A54	1200/175	-	-
H40A55	1575/175	-	-
H40A56	1950/175	-	-
H40A83	1200	840	-
H40A84	1575	840	8
H40A85	1950	840	10


Art no	Height	Width	Weight
			
H40A93	1200	940	7
H40A94	1575	940	9
H40A95	1950	940	11
H40B23	1200	1240	9
H40B24	1575	1240	11
H40B25	1950	1240	13
H40B34	1200/175	-	-
H40B35	1575/175	-	-
H40B36	1950/175	-	-
H40B54	1200/175	-	-
H40B55	1575/175	-	-
H40B56	1950/175	-	-
H40B83	1200	840	6
H40B84	1575	840	8
H40B85	1950	840	10
H40B93	1200	940	7
H40B94	1575	940	9
H40B95	1950	940	11

EFG009691

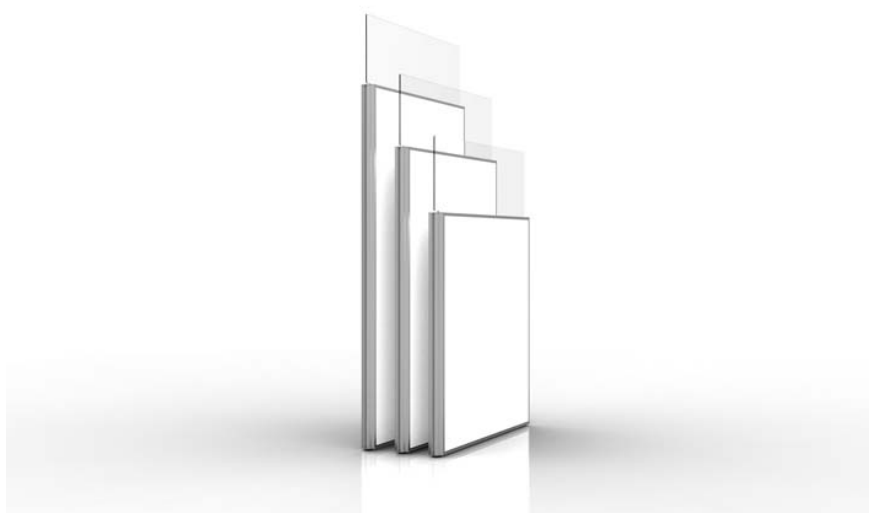

Screens available in three heights and can be fitted with a top section in tempered glass.

EFG009693

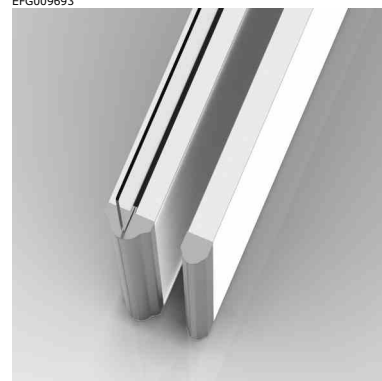

Screens in two thicknesses, 45 or 80 mm.

EFG009692



Both 45 mm and 80 mm modules can be combined for optimal absorption/economy.

EFG009677



Screen support and cable tray.

EFG009645



Panel for power/data outlets. Located on one or two sides, from floor or ceiling.