


# Sela

WITH CASTORS

Sela is a multifunctional stool that supports flexible sitting. The saddle seat provides an active sitting position and focuses on movement, by offering several ways to sit. Sela is mobile and easy to move and fits perfectly in activity-based offices.

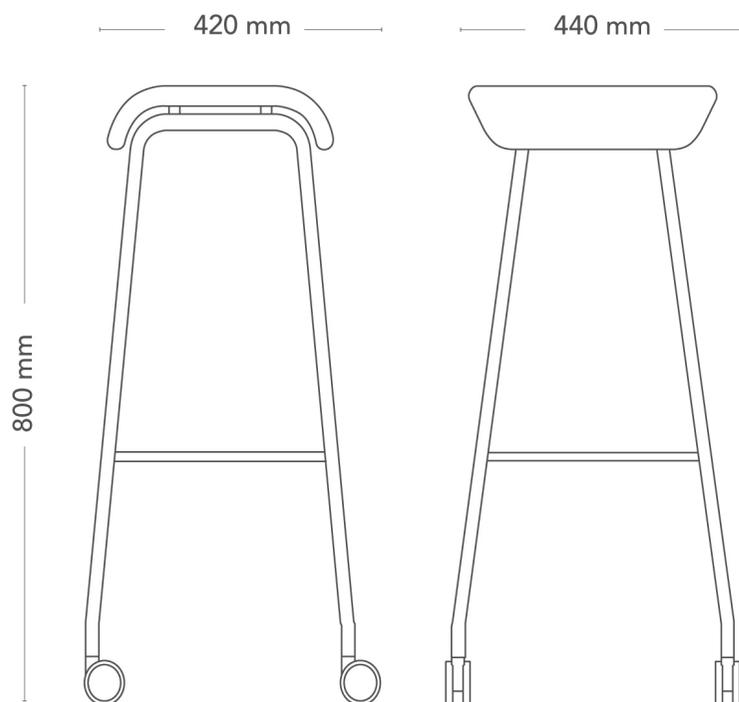


MODEL	Stool, high seat height
VARIANTS	<ul style="list-style-type: none"> <li>– Castors</li> <li>– Sledge</li> </ul>
ACCESSORIES	– RAL Classic
DETAILS	<ul style="list-style-type: none"> <li>– Fits table height approx. 1100 mm.</li> <li>– A stool for mobile and active sitting.</li> </ul>
CONSTRUCTION	Stool with sledge has a powder-coated, bent steel pipe stand 16x2 mm (variety: EN10305-3 E220). Stool with castors has powder-coated, bent steel pipe stand 19x2 mm (variety: EN10305-3 E220) with four legs and castors, diameter 55 mm. Seat in molded wood with cut polyether foam all around, and upholstered. No glue between fabric and foam.
DIMENSIONS	<p>Height: 800 mm</p> <p>Width: 420 mm</p> <p>Depth: 440 mm</p>
WEIGHT	5.2 kg
TESTED	EN 16139:2013
WARRANTY	5 years

# Sela

## WITH SLEDGE

Sela is a multifunctional stool that supports flexible sitting. The saddle seat provides an active sitting position and focuses on movement, by offering several ways to sit. Sela is mobile and easy to move and fits perfectly in activity-based offices.

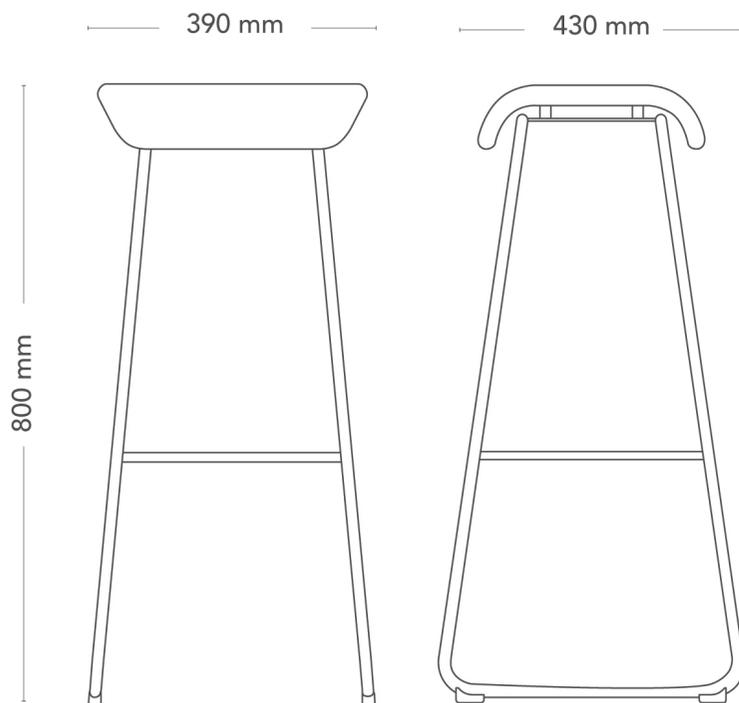

MODEL	Stool, high seat height
VARIANTS	<ul style="list-style-type: none"> <li>– Castors</li> <li>– Sledge</li> </ul>
ACCESSORIES	– RAL Classic
DETAILS	<ul style="list-style-type: none"> <li>– Fits table height approx. 1100 mm.</li> <li>– A stool for mobile and active sitting.</li> </ul>
CONSTRUCTION	Stool with sledge has a powder-coated, bent steel pipe stand 16x2 mm (variety: EN10305-3 E220). Stool with castors has powder-coated, bent steel pipe stand 19x2 mm (variety: EN10305-3 E220) with four legs and castors, diameter 55 mm. Seat in molded wood with cut polyether foam all around, and upholstered. No glue between fabric and foam.
DIMENSIONS	Height: 800 mm Width: 390 mm Depth: 430 mm
WEIGHT	5.2 kg
TESTED	EN 16139:2013
WARRANTY	5 years